


## ENERGIZER L522 Ultimate Lithium





### Industry Standard Dimensions

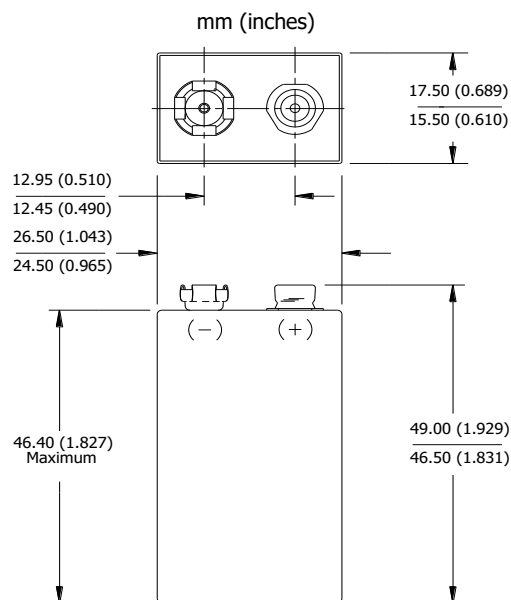




### General Information

|                            |                                                                            |
|----------------------------|----------------------------------------------------------------------------|
| <b>Classification:</b>     | Lithium 9V                                                                 |
| <b>Chemical System:</b>    | Lithium-Manganese Dioxide (Li/MnO <sub>2</sub> )                           |
| <b>Designation:</b>        | ANSI-1604LC                                                                |
| <b>Nominal Voltage:</b>    | 9.0 volts                                                                  |
| <b>Operating Temp:</b>     | -40°C to 60°C (-40°F to 140°F)                                             |
| <b>Storage Temp:</b>       | -40°C to 60°C (-40°F to 140°F)                                             |
| <b>Max Discharge :</b>     | 1000 mA continuous                                                         |
| <b>Safety Features:</b>    | Positive Temperature Coefficient Switch (PTC)<br>Burst Proof Venting Holes |
| <b>Typical Weight:</b>     | 33.9 grams                                                                 |
| <b>Typical Volume:</b>     | 21.4 cubic centimeters                                                     |
| <b>Terminal:</b>           | Miniature Snap                                                             |
| <b>Shelf Life:</b>         | 10 Years                                                                   |
| <b>Typical Li Content:</b> | 1.35 grams                                                                 |

### Milliamp-Hours Performance (21°C)

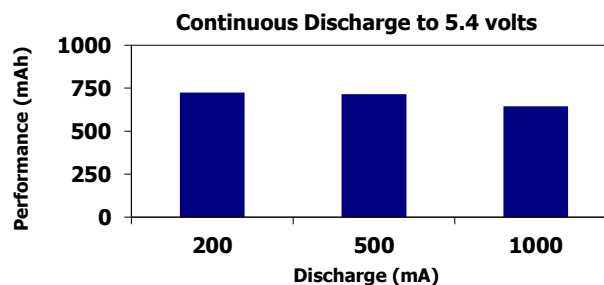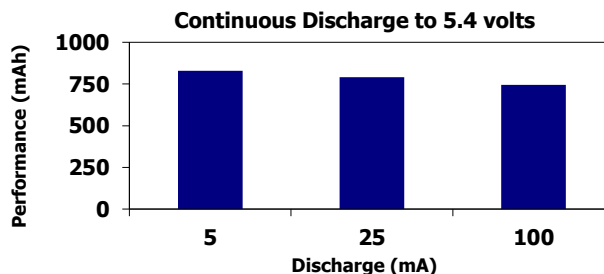

### Typical Discharge Performance (21°C)

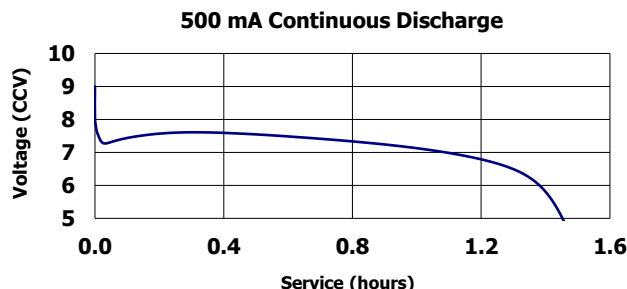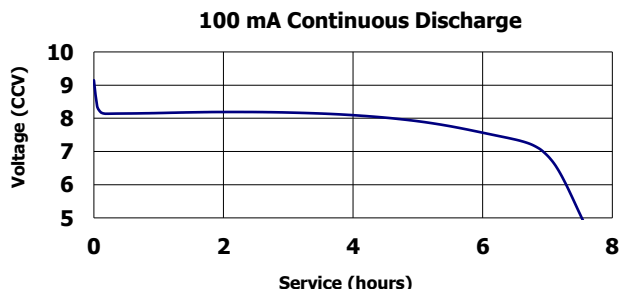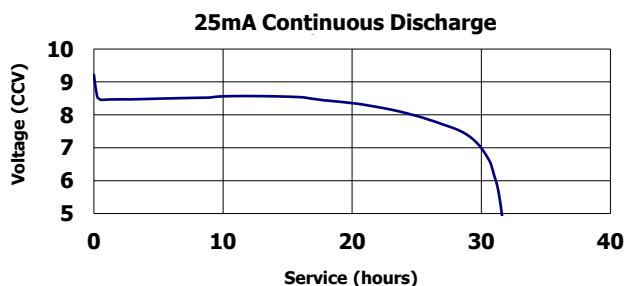

### Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.

**Contents herein do not constitute a warranty and are for reference only.**

Telephone: Toll-free 18601754866 E-mail: sales@10battery.com <https://www.10battery.com>