


## ENERGIZER CR2032

## Lithium Coin



### Industry Standard Dimensions

mm (inches)

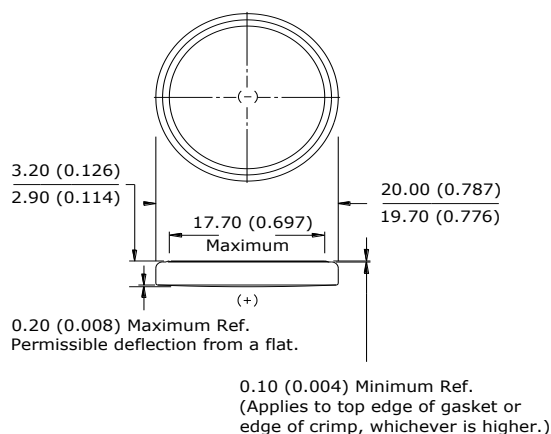


### Simulated Application test

Typical Performance at 21°C (70°F)

Schedule:	Typical Drains:	Load	Cutoff
	at 2.9V (mA)	(ohms)	(hours)
Continuous	0.19	15,000	1235

### Continuous Discharge Characteristics

Load: 15K ohms - continuous 21°C (70°F)  
Typical Drain @ 2.9V: 0.19 mA

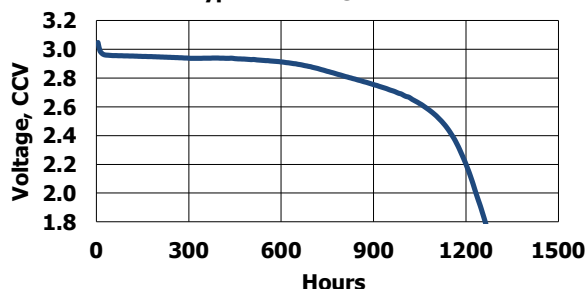


### Pulse Discharge Characteristics

Pulse Test at 21°C (70°F)

**Bkgnd Drain:** Continuous  
21°C (70°F) 15K ohms  
0.19 mA @2.9V

**Pulse Drain:** 2 seconds X 12 times/day  
400 ohms  
~6.8 mA @2.7V

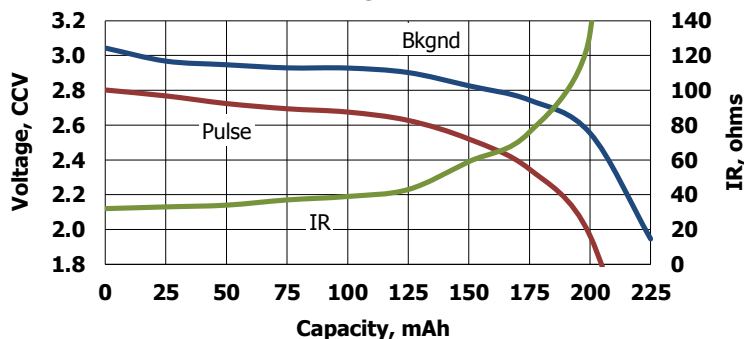

### Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.  
Values are for reference purposes and not intended for specific calculations.

©Energizer Brands, LLC. - Contents herein do not constitute a warranty.

Telephone: Toll-free 18601754866 E-mail: sales@10battery.com Https://www.10battery.com